
INSTALLATION MANUAL

89015AL

LED DALI DIMMABLE QUICK FIX PUSH TO DIM DALI


230V | 50/60Hz | IP20 | Adjustable Output

DALI, Push to DIM, Adjustable output using DIP switches.




one LIGHT

DALI Dimming wiring diagram

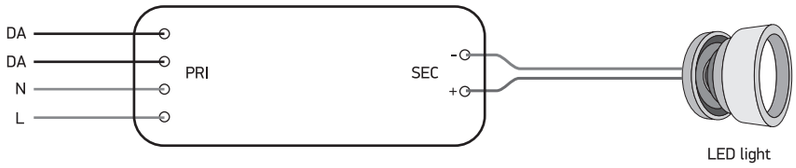


Push to DIM wiring diagram

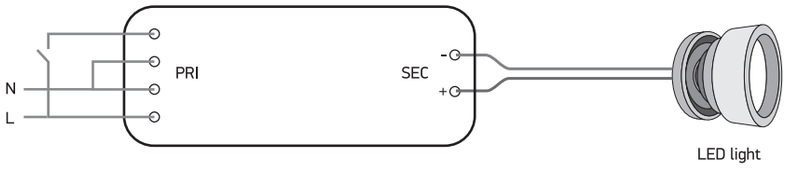

Specifications

Input Voltage & Frequency	220-240V AC 50/60Hz							
Power Factor	≥0,95							
Operating Temperature	Ta: 50°C Tc: +85°C							
Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Voltage	9-42V	9-37V	9-33V	9-30V	9-27V	9-25V	9-23V	9-21V
Output Power	3,15W-14,7W	3,6W-14,8W	4,05W-14,85W	4,5W-15W	4,95W-14,85W	5,4W-15W	5,85W-14,95W	6,3W-14,7W

Current Selection



Primary cable: 2X0,75mm²

Secondary cable: 2X0,50mm²

The driver's output current can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current is set.

Push to DIM

Short Press (40~500ms) - Turn On or Off. Drivers will remember the state they were in when powered off.

Long press (>500ms) - to enter dimming state.

Synchronization - Long press for more than 10 seconds to synchronize multiple drivers at 100% output.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Please select suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation.