

INSTALLATION MANUAL

6306/./V



DC MOTOR **40W MOTOR** **6 SPEED** **WINTER REVERSE MOTOR** **REMOTE CONTROL** **LIGHT ON/OFF SWITCH** **22W LED** **2000 LUMEN**

230V | LED 22W | DC MOTOR 40W | IP20 | Metal body | ABS blades | Rod mounted

· Maximum air flow rate 142m3/min
· Service value 3,5/W
· Standby power consumption 0,5W


· Fan sound power level 50dB(A)
· Maximum air velocity 3,5 m/sec.
· Max RPM 215



6306/..V



- ① LED indicator
- ② ON/OFF
- ③ Mute sound
- ④ Warm white LED
- ⑤ Cool white LED
- ⑥ Daylight LED
- ⑦ Fan OFF
- ⑧ Fan speeds: To turn fan ON 1(lowest) to 6 (highest)
- ⑨ LED light ON / OFF
- ⑩ LED dimmer
- ⑪ Breeze: Fan speeds automatic cycle between 1 to 6
- ⑫ Vacation mode: Switch on the light kit
5 minutes each 2 hours
- ⑬ Reverse function for winter and summer
- ⑭ Timer: Fan stops after 2h/4h/8h

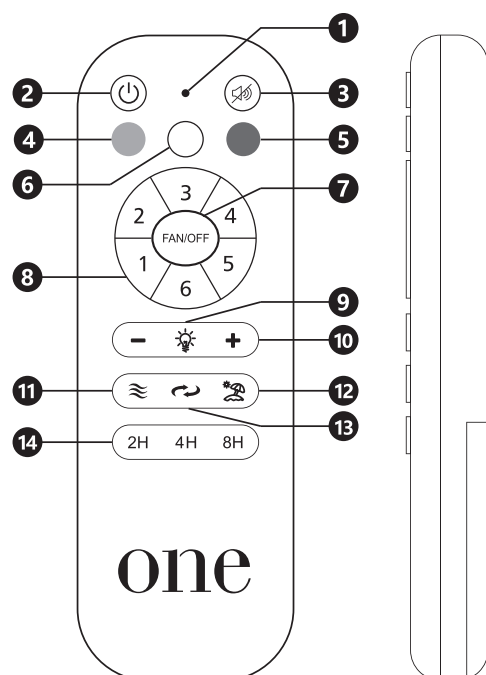

NOTE: To pair a remote to a receiver turn ON the power supply to the fan and press the ON/OFF and MUTE keys on the remote for 3 to 5 seconds. You will hear a beep.



- 1 Hanger bracket
- 2 Receiver
- 3 Rod assembly
- 4 Canopy
- 5 Canopy cover
- 6 Motor
- 7 22W LED
- 8 Remote control + holder
+2 mounting screws
+1.5V (AAA)x2 batteries
- 9 Cover
- 10 Upper motor cover
- 11 Diffuser
- 12 Fan blades (3pcs)
- A Screws for blades
- B Mounting hardware
- C Blade balancing kit

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.