

10 Office & Kitchen>Suspended Up/Down UGR19

38012B/W/V



50W CCT Variable 30x150cm LED suspended downlight + uplight panel.

55% downwards emission / 45% upwards emission.

Aluminium body with PMMA diffuser.

Complete with ceiling mounted driver-box including non-dimmable driver and 2m suspension kit.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

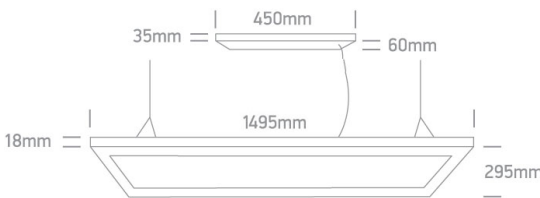

Gallery



Related items



89050LL

Physical Specification

Item Group
Family
Order Code
Colour
Material
Diffuser Material
Shape
Length
Width
Height
Suspended Ceiling
Indoor
Adjustable

10 Office & Kitchen
Suspended Up/Down UGR19
38012B/W/V
White
Aluminium
Plastic
Rectangular
1495mm
295mm
18mm
Yes
Yes
No

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark

Built In
220-240V
Yes
Yes

50W
IP20
LED built in
No


Fitting
Input Type
Light Source

Constant Current
LED built in

LED Type	SMD
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Output	1300mA
Safety Class	
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	5000lm
Light Efficiency	100lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	4.680kg
Pcs/Carton	4
Barcode	5291889083191
HS Code	9405119090

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

