
INSTALLATION MANUAL

89026AL

LED DALI DIMMABLE PUSH TO DIM DALI 2 CE EAC UK CA RoHS COMPLIANT DIMMABLE


230V | 50/60Hz | IP20 | Adjustable Output

DALI, Push to DIM, Adjustable output using DIP switches.




one LIGHT

DALI Dimming wiring diagram

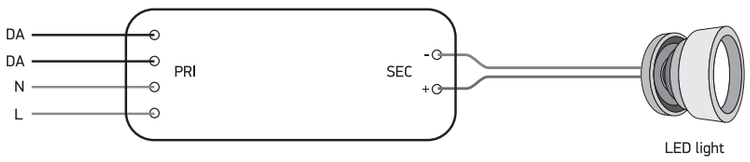


Push to DIM wiring diagram

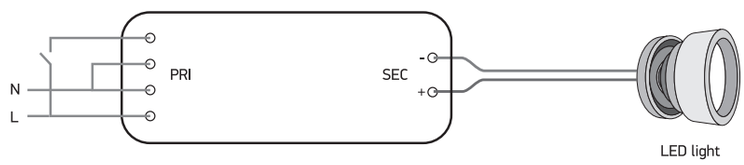

Specifications

Input Voltage & Frequency	220-240V AC 50/60Hz											
Power Factor	≥0,95											
Operating Temperature	Ta: +45°C Tc: +80°C											
Output Current	160mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Voltage	30-50V	30-50V	20-50V	20-50V	20-50V	20-50V	20-50V	20-50V	20-47V	20-43V	20-40V	20-37V
Output Power	4,80W-8W	6W-10W	5W-12,50W	6W-15W	7W-17,50W	8W-20W	9W-22,50W	10W-25W	11W-25,85W	12W-25,80W	13W-26W	14W-26W

Current Selection

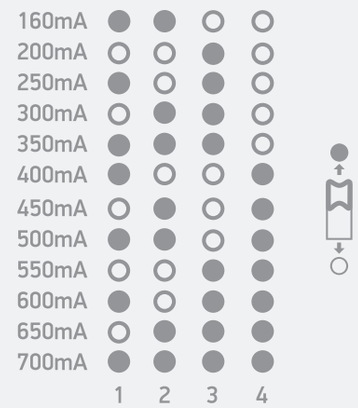

Primary cable: 2X0,75mm²

Secondary cable: 2X0,50mm²

The driver's output current can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current is set.

Push to DIM

Short Press (40~500ms) - Turn On or Off. Drivers will remember the state they were in when powered off.

Long press (>500ms) - to enter dimming state.

Synchronization - Long press for more than 10 seconds to synchronize multiple drivers at 100% output.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Please select suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation.