



05 Downlights Fixed>Panels For Germany/Austria 620x620mm

50140BAU/W/V



40W CCT Variable 60x60 recessed backlit LED panel with microprismatic diffuser for T-rail false ceilings.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

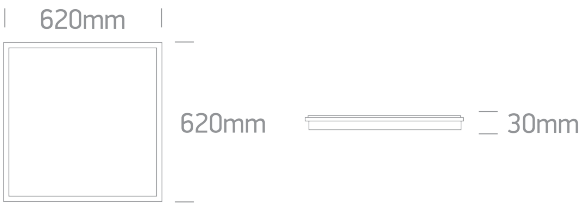

Related items



050017



050108



89040L

Physical Specification

Item Group	05 Downlights Fixed
Family	Panels For Germany/Austria 620x620mm
Order Code	50140BAU/W/V
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	620mm

Width	620mm
Height	30mm
Recessed T-Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Safety Class	
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1000mA
IP Rating
Safety Class
Dimmable
Housing Material

Led Driver
220-240V
Yes
Yes
33-40W
0,9
Yes
33-40V
IP20

No
Plastic

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
3600lm-4000lm-3800lm
90lm/W - 100lm/W - 95lm/W
80

19

Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

2.125kg
4
5291889079002
9405119090

Certification & Warranty

switch to
one light!

