



05 Downlights Fixed>The IP65 Recessed Panels 600x600mm

50140BW/W/V



60x60 backlit IP65 recessed CCT Variable LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 950mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

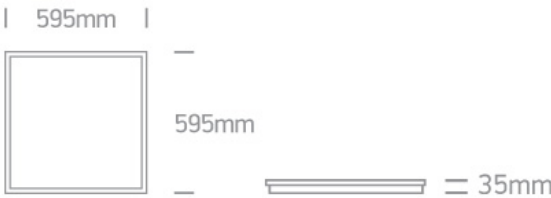

Related items



050017



050108

Physical Specification

|            |                                    |
|------------|------------------------------------|
| Item Group | 05 Downlights Fixed                |
| Family     | The IP65 Recessed Panels 600x600mm |
| Order Code | 50140BW/W/V                        |
| Colour     | White                              |
| Material   | Aluminium + Steel                  |
| Shape      | Rectangular                        |
| Length     | 595mm                              |

|                    |       |
|--------------------|-------|
| Width              | 595mm |
| Height             | 35mm  |
| Recessed T-Ceiling | Yes   |
| Depth Required     | 60mm  |
| Indoor             | Yes   |
| Adjustable         | No    |

Electrical Characteristics

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear             | External-Included                                                                     |
| Fitting + Driver |                                                                                       |
| Input Voltage    | 220-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Safety Class     |  |
| Power(Watts)     | 40W                                                                                   |
| IP Rating        | IP65                                                                                  |
| Light Source     | LED built in                                                                          |
| Dimmable         | No                                                                                    |
| F Mark           |  |

|               |                                                                                       |
|---------------|---------------------------------------------------------------------------------------|
| Fitting       |                                                                                       |
| Input Type    | Constant Current                                                                      |
| Input Current | 950mA                                                                                 |
| Safety Class  |  |
| IP Rating     | IP65                                                                                  |
| Light Source  | LED built in                                                                          |
| LED Type      | SMD 2835                                                                              |

|           |            |
|-----------|------------|
| Gear      |            |
| Gear Type | Led Driver |

|                  |                                                                                     |
|------------------|-------------------------------------------------------------------------------------|
| Input Voltage    | 220-240V                                                                            |
| 50 Hz            | Yes                                                                                 |
| 60 Hz            | Yes                                                                                 |
| Constant Current | Yes                                                                                 |
| IP Rating        | IP65                                                                                |
| Safety Class     |  |
| Dimmable         | No                                                                                  |
| Brand            | Yingjiao                                                                            |
| Protection       | No-Load, Short Circuit                                                              |

Illumination Data

|                      |                                                                                       |
|----------------------|---------------------------------------------------------------------------------------|
| Colour Temperature   | 3000K-4000K-5700K                                                                     |
| Lumen Output         | 4000lm                                                                                |
| Light Efficiency     | 100lm/W                                                                               |
| CRI                  | 80                                                                                    |
| Illumination Diagram |  |

Packing Info

|            |               |
|------------|---------------|
| Box Weight | 2.250kg       |
| Pcs/Carton | 4             |
| Barcode    | 5291889077121 |
| HS Code    | 9405119090    |

Certification & Warranty

switch to  
**one light!**

