




12 Wall & Ceiling LED>Down Illumination Wall Lights ABS + PC

67386C/W/V

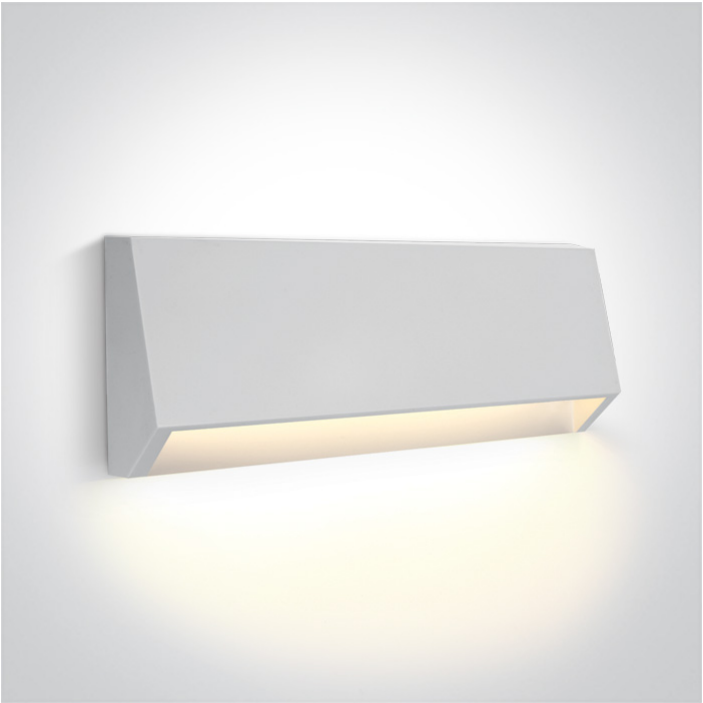

4W CCT Variable AC LED wall light, IP65, ideal for both indoor and outdoor installation.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

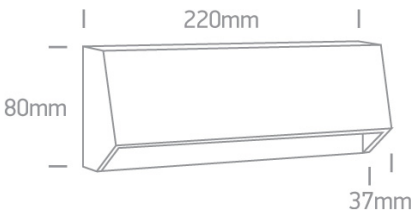

Physical Specification

|                   |                                        |
|-------------------|----------------------------------------|
| Item Group        | 12 Wall & Ceiling LED                  |
| Family            | Down Illumination Wall Lights ABS + PC |
| Order Code        | 67386C/W/V                             |
| Colour            | White                                  |
| Material          | ABS                                    |
| Diffuser Material | PC                                     |
| Shape             | Rectangular                            |
| Length            | 220mm                                  |
| Width             | 37mm                                   |
| Height            | 80mm                                   |
| Surface Wall      | Yes                                    |
| Indoor            | Yes                                    |

|                            |                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------|
| Outdoor                    | Yes                                                                                   |
| Electrical Characteristics |                                                                                       |
| Gear                       | No                                                                                    |
| Fitting + Driver           |                                                                                       |
| Input Voltage              | 220-240V                                                                              |
| 50 Hz                      | Yes                                                                                   |
| 60 Hz                      | Yes                                                                                   |
| Safety Class               |    |
| Power(Watts)               | 4W                                                                                    |
| IP Rating                  | IP65                                                                                  |
| Light Source               | LED built in                                                                          |
| Dimmable                   | No                                                                                    |
| F Mark                     |  |

Illumination Data

|                      |                                                                                       |
|----------------------|---------------------------------------------------------------------------------------|
| Colour Code          | 2700K-3300K-4000K                                                                     |
| Lumen Output         | 220lm                                                                                 |
| Light Efficiency     | 55lm/W                                                                                |
| CRI                  | 80                                                                                    |
| Illumination Diagram |  |
| Dark Light           | Yes                                                                                   |

Packing Info

|            |         |
|------------|---------|
| Box Length | 23cm    |
| Box Width  | 9cm     |
| Box Height | 4,5cm   |
| Box Weight | 0.270kg |
| Pcs/Carton | 20      |

|         |               |
|---------|---------------|
| Barcode | 5291889083009 |
| HS Code | 9405114090    |

Certification & Warranty

|          |         |
|----------|---------|
| Warranty | 2 years |
|----------|---------|

switch to  
**one light!**

