



18 Wall Recessed & Inground>The Asymmetric Inground Stainless steel

69062/W



8W COB LED inground assymetrical beam, IP67, stainless steel 316, for path illumination.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

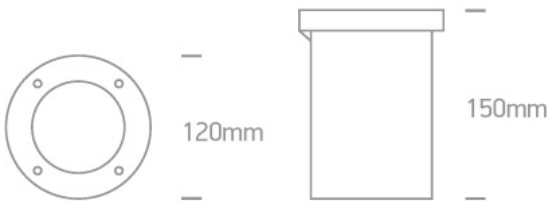

Gallery



Physical Specification

Item Group	18 Wall Recessed & Inground
Family	The Asymmetric Inground Stainless steel
Order Code	69062/W
Colour	Stainless Steel
Material	Stainless Steel 316
Shape	Circular
Height	150mm

Diameter	120mm
Cutout Hole Diameter	115mm
Inground	Yes
Depth Required	170mm+300mm drainage
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP67
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	22V
Safety Class	
Power(Watts)	7,7W
IP Rating	IP67

Light Source
LED Type
LED Brand

LED built in
SMD 2835
Edison

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
350mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
4,2-7W
0,8
Yes
12-20V
IP20

No
-20~+55°C
80°C
Plastic
Connector
HEP
Short Circuit

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram

3000K
680lm
85lm/W
80


Packing Info

Box Weight	1.225kg
Pcs/Carton	12
Barcode	5291889066071
HS Code	9405413990

Certification & Warranty

Warranty	2 years
----------	---------

switch to
one light!

