



18 Wall Recessed & Inground>The Low Depth Inground 24V DC

69076A/W



3x1W LED inground. IP67, stainless steel 316L and die cast aluminium body.

Requires 24V DC driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

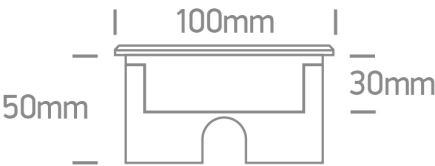

Gallery



Physical Specification

|            |                               |
|------------|-------------------------------|
| Item Group | 18 Wall Recessed & Inground   |
| Family     | The Low Depth Inground 24V DC |
| Order Code | 69076A/W                      |
| Colour     | Stainless Steel               |
| Material   | Stainless Steel 316           |
| Shape      | Circular                      |
| Height     | 50mm                          |

|                |                     |
|----------------|---------------------|
| Diameter       | 100mm               |
| Inground       | Yes                 |
| Depth Required | 50mm+300mm drainage |
| Indoor         | Yes                 |
| Outdoor        | Yes                 |
| Adjustable     | No                  |
| IK Rating      | 10                  |

Electrical Characteristics

|               |                                                                                       |
|---------------|---------------------------------------------------------------------------------------|
| Gear          | Order Separately                                                                      |
| Fitting       |                                                                                       |
| Input Type    | Constant Voltage                                                                      |
| Input Voltage | 24V DC                                                                                |
| Safety Class  |  |
| Power(Watts)  | 3W                                                                                    |
| Light Source  | LED built in                                                                          |
| Cable Length  | 2m                                                                                    |
| F Mark        |  |

Illumination Data

|                      |                                                                                       |
|----------------------|---------------------------------------------------------------------------------------|
| Colour Temperature   | 3000K                                                                                 |
| Lumen Output         | 300lm                                                                                 |
| Light Efficiency     | 100lm/W                                                                               |
| CRI                  | 90                                                                                    |
| Beam Angle           | 45°                                                                                   |
| Illumination Diagram |  |

Packing Info

|            |         |
|------------|---------|
| Box Weight | 0.625kg |
|------------|---------|

|            |  |
|------------|--|
| Pcs/Carton |  |
| Barcode    |  |
| HS Code    |  |

|               |
|---------------|
| 24            |
| 5291889084037 |
| 9405413990    |

Certification & Warranty

|          |
|----------|
| Warranty |
|----------|

|         |
|---------|
| 2 years |
|---------|

switch to  
**one light!**

