Product Datasheet

www.1-light.eu

02 Recessed Spots Fixed LED>The Dark Light Pro Range Aluminium

10115FD/W/W



15W COB LED recessed spot, IP20, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 90 CRI DARK LIGHT CE

Downloads

IES

Dimensions

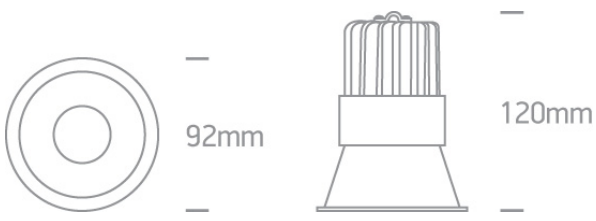

Gallery



Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The Dark Light Pro Range Aluminium
Order Code	10115FD/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	120mm

Diameter	92mm
Cutout Hole Diameter	82mm
Recessed Ceiling	Yes
Depth Required	150mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	39,5V
Safety Class	III
Power(Watts)	13,82W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

LED Number	1
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,75-14W
Power Factor	0,9
Constant Current	Yes
350mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	LIFUD

Illumination Data

Colour Temperature	3000K
Lumen Output	1275lm
Light Efficiency	85lm/W
CRI	90
Beam Angle	24°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	12,5cm
Box Width	10cm

Box Height	14cm
Box Weight	0.390kg
Pcs/Carton	20
Barcode	5291889057383
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

