Product Datasheet

www.1-light.eu

05 Downlights Fixed>UGR19 CCT V Range

10120UV/W/V



20W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with Non-flickering 500mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 IK04 90 CRI UGR19 CE

Downloads


IES

Dimensions

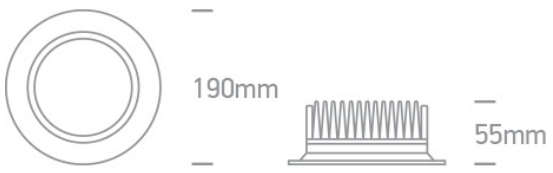

Gallery





Physical Specification

Item Group	05 Downlights Fixed
Family	UGR19 CCT V Range
Order Code	10120UV/W/V
Colour	White
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	190mm
Cutout Hole Diameter	170mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	20W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	36V
Safety Class	III
Power(Watts)	19,8W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	13,75-22W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP44
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

Illumination Data

Colour Temperature	3000K-4000K-6000K
Lumen Output	1500lm
Light Efficiency	75lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	0.615kg

Pcs/Carton	20
Barcode	5291889065319
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

one LIGHT

