Product Datasheet

www.1-light.eu

05 Downlights Fixed>UGR 19 CCT V Office Range Round

10130U/W/C



30W SMD LED UGR19 downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 IK04 80 CRI UGR19

Downloads

IES

Dimensions

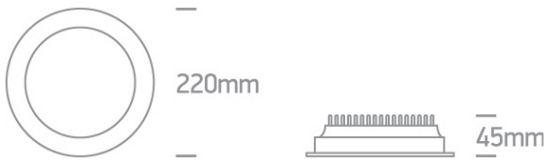

Gallery



Physical Specification

Item Group	05 Downlights Fixed
Family	UGR 19 CCT V Office Range Round
Order Code	10130U/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	45mm

Diameter	220mm
Cutout Hole Diameter	205mm
Recessed Ceiling	Yes
Depth Required	65mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	750mA
Voltage	38V
Safety Class	
Power(Watts)	28,5W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	19,75-30W
Power Factor	0,9
Constant Current	Yes
750mA	25-40V
IP Rating	IP44
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

Illumination Data

Colour Temperature	4000K
Lumen Output	2250lm
Light Efficiency	75lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	0.990kg

Pcs/Carton	10
Barcode	5291889065371
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!

one LIGHT

