Product Datasheet

www.1-light.eu

05 Downlights Fixed>UGR 19 CCT V Office Range Round

10130U/W/V



30W SMD LED UGR19 CCT Variable downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 IK04 CCT V 90 CRI UGR19 CE

Downloads


IES

Dimensions

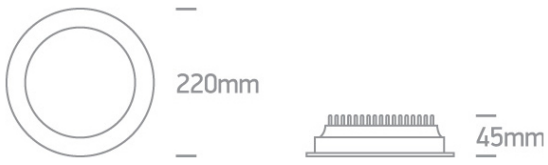

Gallery





Physical Specification

Item Group	05 Downlights Fixed
Family	UGR 19 CCT V Office Range Round
Order Code	10130U/W/V
Colour	White
Material	Die Cast
Shape	Circular
Height	45mm

Diameter	220mm
Cutout Hole Diameter	205mm
Recessed Ceiling	Yes
Depth Required	65mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	750mA
Safety Class	III
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835
F Mark	F

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
IP Rating	IP44
Safety Class	
Dimmable	No
Brand	Lifud
Protection	Short Circuit and Overload

Illumination Data

Colour Temperature	3000K-4000K-6000K
Lumen Output	2500lm
Light Efficiency	83lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Box Weight	0.990kg
Pcs/Carton	10
Barcode	5291889080886
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

