Product Datasheet

www.1-light.eu

06 Downlights Adjustable>The Pop Up Range

11115G/W/W



15W COB LED zoomable 15°-45° adjustable downlight with removable honeycomb.

Complete with 350mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 90 CRI ADJUSTABLE CE

Downloads

IES CE

Dimensions

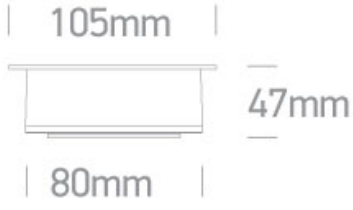

Gallery



Physical Specification

Item Group	06 Downlights Adjustable
Family	The Pop Up Range
Order Code	11115G/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	47mm

Diameter	105mm
Cutout Hole Diameter	98mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	41V
Safety Class	
Power(Watts)	14,35W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

LED Number	1

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,45-14,7W
Power Factor	0,92
Constant Current	Yes
350mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KGP
Protection	Short Circuit Protection,Overload Protection,No-load Protection

Illumination Data

Colour Temperature	3000K
Lumen Output	1500lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	15°-45°
Illumination Diagram	

Packing Info

Box Weight	0.555kg
Pcs/Carton	27

Barcode	5291889076469
HS Code	9405413990

Certification & Warranty

Warranty	5 years

switch to
one light!

