Product Datasheet

www.1-light.eu

06 Downlights Adjustable>The Pop Up Range

11128G/B/W



25W COB LED zoomable 15°-45° adjustable downlight with removable honeycomb.

Complete with 600mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 90 CRI ADJUSTABLE CE

Downloads

IES

Dimensions

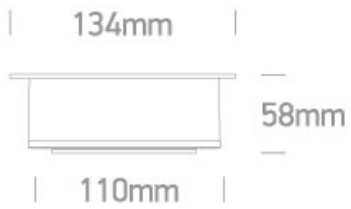

Gallery



Physical Specification

Item Group	06 Downlights Adjustable
Family	The Pop Up Range
Order Code	11128G/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	58mm

Diameter	134mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	600mA
Safety Class	III
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18-26,4W
Power Factor	0,95
Constant Current	Yes
600mA	30-44V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KGP
Protection	Short Circuit Protection,Overload Protection,No-load Protection

Illumination Data

Colour Temperature	3000K
Lumen Output	2500lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	15°-45°
Illumination Diagram	

Packing Info

Box Weight	0.894kg
Pcs/Carton	18
Barcode	5291889076476
HS Code	9405413990

Certification & Warranty

Warranty	5 years

switch to
one light!

