Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The IP65 LED Slim Range PC

38118LA/D



18W IP65 slim LED fitting .

Stainless steel clips included.

Polycarbonate body and diffuser.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads

IES CE

Dimensions

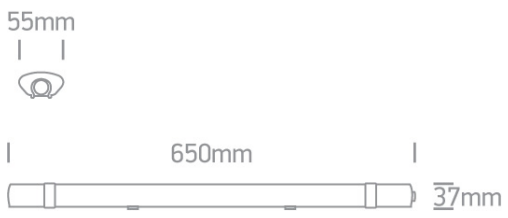

Gallery



Must be ordered separately



050084

Physical Specification

Item Group	20 Industrial & Floodlights
Family	The IP65 LED Slim Range PC
Order Code	38118LA/D
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	650mm
Width	65mm
Height	37mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	F

Fitting

Input Type	Constant Current
Power(Watts)	18W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	⧈
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	6000K
Lumen Output	1600lm
Light Efficiency	88,9lm/W
CRI	80

Beam Angle	120°
Illumination Diagram	

Packing Info

Box Length	66cm
Box Width	9,5cm
Box Height	9,2cm
Box Weight	0.275kg
Pcs/Carton	20
Barcode	5291889051107
HS Code	9405114090

Certification & Warranty

Warranty	2 years

switch to
one light!

