Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The High Power IP65 LED Range

38118M/C



IP65 LED fitting to replace T8 IP65 traditional waterproof fluorescent. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads


IES CE

Dimensions

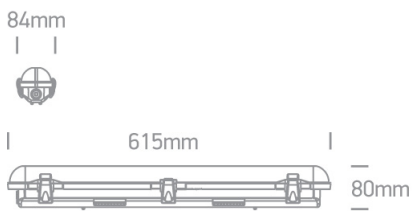

Gallery





Physical Specification

Item Group	20 Industrial & Floodlights
Family	The High Power IP65 LED Range
Order Code	38118M/C
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular

Length	615mm
Width	84mm
Height	80mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	400mA
Voltage	36V
Power(Watts)	14,4W
IP Rating	IP65
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Everlight
LED Number	54

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,45-14W
Power Factor	0,9
Constant Current	Yes
350mA	27-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Tridonic

Illumination Data

Colour Temperature	4000K
Lumen Output	1500lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	62cm
Box Width	8,3cm

Box Height	9cm
Box Weight	0.816kg
Pcs/Carton	12
Barcode	5291889054986
HS Code	9405114090

Certification & Warranty

Warranty	3 years

switch to
one light!

