Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The IP65 CCT V & PV Range

38140ME/V



50W LED CCT Variable & Power variable industrial emergency fitting. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 CCT V PV 80 CRI CE


Downloads


IES CE

Dimensions

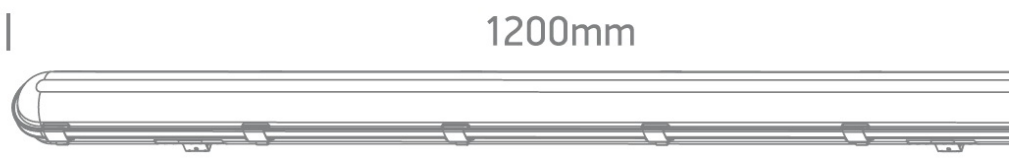

Gallery





Physical Specification

Item Group	20 Industrial & Floodlights
Family	The IP65 CCT V & PV Range
Order Code	38140ME/V
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular

Length	1200mm
Width	77mm
Height	66mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	28W/36W/42W/50W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	350mA
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No
Operation Time	3 Hours
Charging Time	16 Hours
Maintained	Yes
Non Maintained	Yes

Illumination Data

Colour Temperature	3000K-4000K-6500K
Lumen Output	5000lm @ 50W
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1.830kg
Pcs/Carton	12
Barcode	5291889083108
HS Code	9405114090

Certification & Warranty

Warranty	3 years

switch to
one light!

