Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The IP65 LED Slim Range PC

38145LA/C



45W IP65 slim LED fitting .

Stainless steel clips included.

Polycarbonate body and diffuser.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads

IES CE

Dimensions

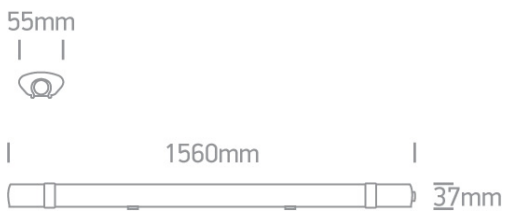

Gallery



Must be ordered separately



050084

Physical Specification

Item Group	20 Industrial & Floodlights
Family	The IP65 LED Slim Range PC
Order Code	38145LA/C
Colour	White
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	1560mm
Width	55mm
Height	37mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	45W
IP Rating	IP65
Light Source	LED built in
Dimmable	No

Cable Length	50cm
F Mark	

Fitting

Input Type	Constant Current
Power(Watts)	45W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	45W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise

Illumination Data

Colour Temperature	4000K
Lumen Output	4100lm
Light Efficiency	91,1lm/W
CRI	80

Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	0.520kg
Pcs/Carton	20
Barcode	5291889051138
HS Code	9405114090

Certification & Warranty

Warranty	2 years

switch to
one light!

