
Product Datasheet

www.1-light.eu

10 Office & Kitchen>Opal Recessed LED Linear Profiles

38152R/B/W

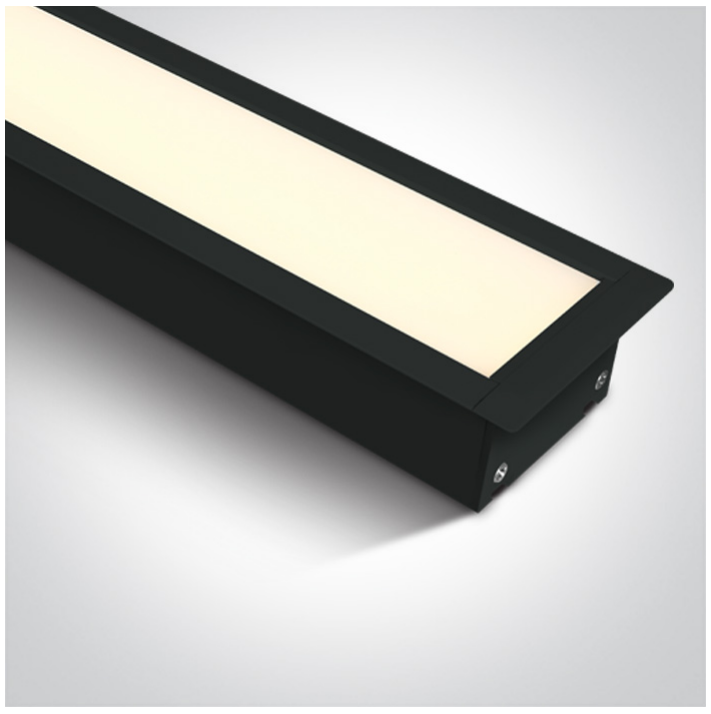

40W Recessed linear with diffuser, ideal for offices.

Complete with 1000mA driver, 6pcs fixing clips, 4pcs connectors & 2pcs end cups.

Can be connected in line.


Complies with standard EN60598-1 and any other specific standards.

IP20 90 CRI CE

Downloads

IES CE

Dimensions

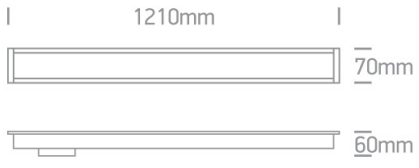

Physical Specification

Item Group	10 Office & Kitchen
Family	Opal Recessed LED Linear Profiles
Order Code	38152R/B/W
Colour	Black
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular
Length	1210mm
Width	70mm
Height	60mm
Cutout Hole Width	60mm
Cutout Hole Length	1200mm

Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	1000mA
Voltage	36V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	288

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30-42W
Power Factor	0,95
Constant Current	Yes
1000mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Metal
Output Terminal	Connector
Brand	BOKE

Illumination Data

Colour Temperature	3000K
Lumen Output	3600lm
Light Efficiency	90lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Weight	2.325kg
Pcs/Carton	12
Barcode	5291889075615
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

