Product Datasheet

www.1-light.eu

10 Office & Kitchen>CCT V Opal Recessed LED Linear Profiles

38152RC/W/V



CCT and Power variable 14W corner for 38152R.


Complete with power variable driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 CCT V PV 90 CRI CE

Downloads

Dimensions

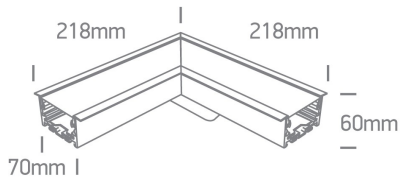

Gallery



Related items



38152R/W/V

Physical Specification

Item Group	10 Office & Kitchen
Family	CCT V Opal Recessed LED Linear Profiles

Order Code	38152RC/W/V
Colour	White
Material	Aluminium
Shape	Rectangular
Length	218x218mm
Width	70mm
Height	60mm
Cutout Hole Width	211x211mm
Cutout Hole Length	60mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	6W-8W-10W-14W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
IP Rating	IP20

Light Source	LED built in
LED Type	SMD

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	720m (8W)
Light Efficiency	90lm/W
CRI	90
Illumination Diagram	

Packing Info

Pcs/Carton	10
Barcode	5291889082583
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

