Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The High Power IP65 LED Range

38158M/C



IP65 LED fitting to replace T8 IP65 traditional waterproof fluorescent. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads

IES CE

Dimensions

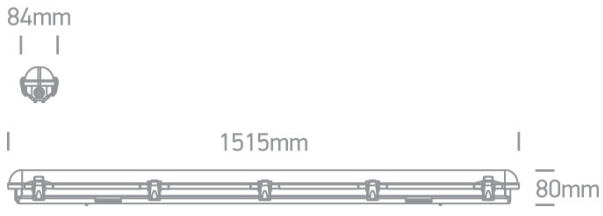

Gallery





Physical Specification

Item Group	20 Industrial & Floodlights
Family	The High Power IP65 LED Range
Order Code	38158M/C
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular

Length	1515mm
Width	84mm
Height	80mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	40W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	700mA
Voltage	54V
Power(Watts)	37,8W
IP Rating	IP65
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Everlight

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	14-42W
Power Factor	0,9
Constant Current	Yes
700mA	20-54V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Tridonic

Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	152cm
Box Width	8,3cm
Box Height	9cm

Box Weight	1.700kg
Pcs/Carton	9
Barcode	5291889055013
HS Code	9405114090

Certification & Warranty

Warranty	3 years

switch to
one light!

one
LIGHT

