Product Datasheet

www.1-light.eu

05 Downlights Fixed>UGR19 CCT V Office Range Square

50110UV/W/V



10W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 200mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP44 80 CRI UGR19 CE


Downloads

IES

Dimensions

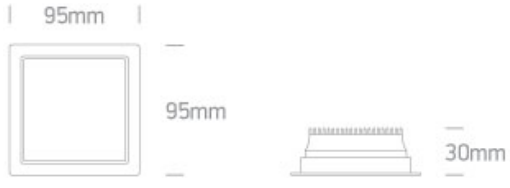

Gallery



Physical Specification

Item Group	05 Downlights Fixed
Family	UGR19 CCT V Office Range Square
Order Code	50110UV/W/V
Colour	White
Material	Die Cast
Shape	Rectangular
Length	95mm

Width	95mm
Height	30mm
Cutout Hole Width	85mm
Cutout Hole Length	85mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	200mA
Voltage	38,5V
Safety Class	
Power(Watts)	7,7W
IP Rating	IP44
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	5-8,4W
Power Factor	0,7
Constant Current	Yes
200mA	25-42V
IP Rating	IP44
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

Illumination Data

Colour Temperature	3000K-4000K-6000K
Lumen Output	1100lm
Light Efficiency	110lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	0.310kg
Pcs/Carton	40
Barcode	5291889075660
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

one
LIGHT

