
Product Datasheet

www.1-light.eu

05 Downlights Fixed>The 16-30W Square Recessed Panels Aluminium

50122FA/W/V

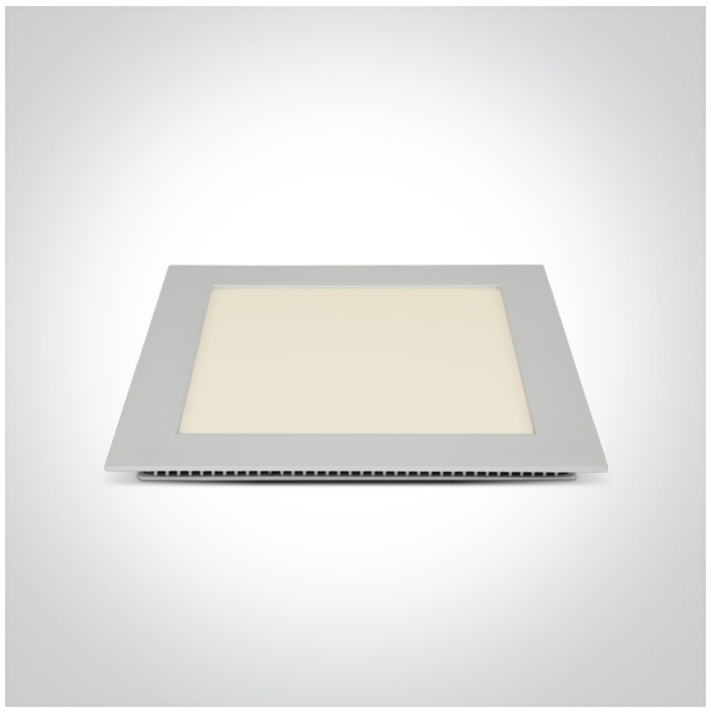

CCT Variable 22W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms.

Complete with 550mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE


Downloads

IES CE

Dimensions



Gallery



Physical Specification

Item Group	05 Downlights Fixed
Family	The 16-30W Square Recessed Panels Aluminium
Order Code	50122FA/W/V
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Rectangular

Length	225mm
Width	225mm
Height	22mm
Cutout Hole Width	210mm
Cutout Hole Length	210mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	550mA
Safety Class	
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
LED Number	168

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	13,75-23W
Constant Current	Yes
550mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	2200lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	0.687kg
Pcs/Carton	16

Barcode	5291889078982
HS Code	9405119090

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!

