Product Datasheet

www.1-light.eu

05 Downlights Fixed>LED Downlights

50130B/W/C



30W downlight LED, shop square boxes range IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 750mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

IES

Dimensions

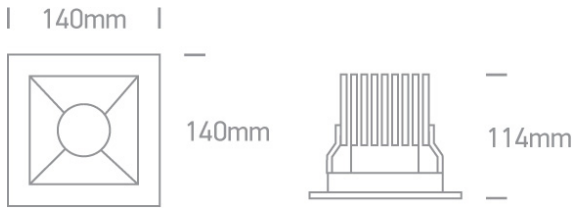

Physical Specification

Item Group	05 Downlights Fixed
Family	LED Downlights
Order Code	50130B/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	140mm
Width	140mm
Height	114mm
Cutout Hole Width	130mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes

Depth Required	120mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	750mA
Voltage	35,5V
Safety Class	
Power(Watts)	26,62W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Sanan

Gear

Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-30W
Power Factor	0,9
Constant Current	Yes
750mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	2700lm
Light Efficiency	90lm/W
CRI	80
Beam Angle	30°
Illumination Diagram	

Packing Info

Box Length	16cm
Box Width	16cm
Box Height	13cm
Box Weight	0.988kg
Pcs/Carton	16
Barcode	5291889061434
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

