Product Datasheet

www.1-light.eu

04 Recessed Spots Adjustable LED>The Interchangeable Rings Range Aluminium

51112H/W/W



12W COB LED adjustable recessed spot with interchargeable rings.

Ring must be ordered separately.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI ADJUSTABLE CE


Downloads

IES CE

Dimensions

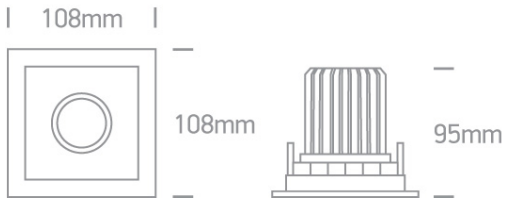

Must be ordered separately



050088/BS



050088/G



050088/W



050088A/W

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The Interchangeable Rings Range Aluminium
Order Code	51112H/W/W
Colour	White
Material	Aluminium
Shape	Rectangular

Length	108mm
Width	108mm
Height	95mm
Cutout Hole Width	95mm
Cutout Hole Length	95mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	III
Power(Watts)	10,8V
IP Rating	IP20

Light Source	LED built in
LED Type	COB
LED Brand	Cree
LED Number	1
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9-12W
Power Factor	0,9
Constant Current	Yes
300mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	940lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	

Packing Info

Box Length	12cm

Box Width	12cm
Box Height	12cm
Box Weight	0.480kg
Pcs/Carton	30
Barcode	5291889051343
HS Code	9405413990

Certification & Warranty

Warranty	5 years

switch to
one light!

