
Product Datasheet

www.1-light.eu

10 Office & Kitchen>UGR19 Backlit CCT V

62150BFU/W/V

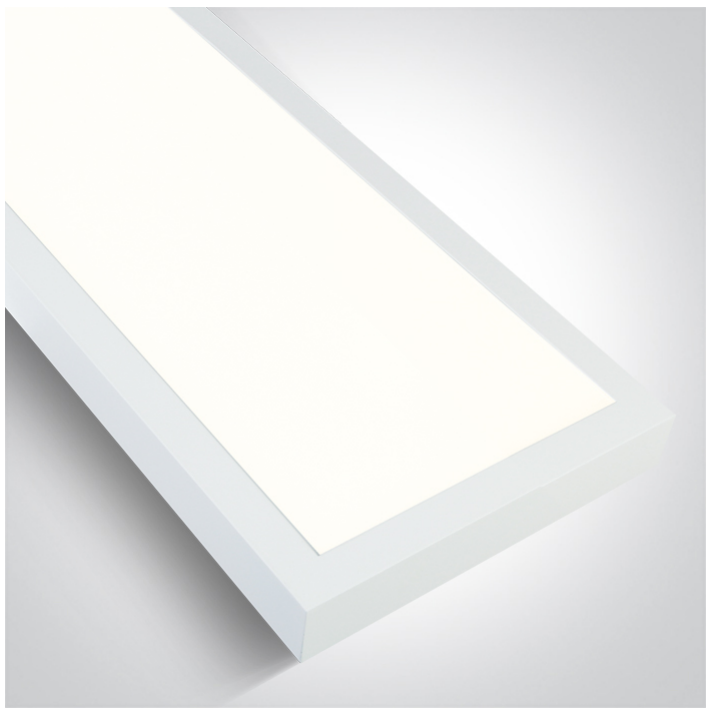

15x150cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI UGR19 CE

Downloads

IES CE

Dimensions

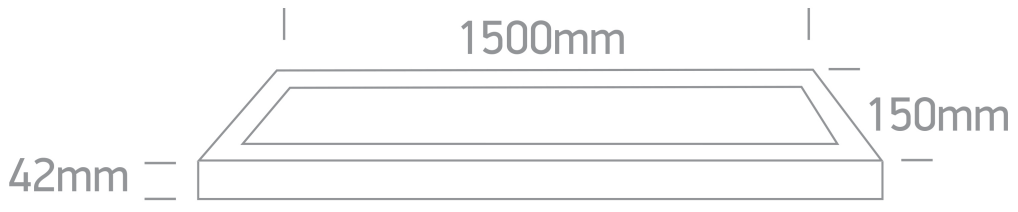

Physical Specification

Item Group	10 Office & Kitchen
Family	UGR19 Backlit CCT V
Order Code	62150BFU/W/V
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	1500mm
Width	150mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	Ⓕ

Fitting

Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	Ⓕ

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25W-38W

Power Factor	0,9
Constant Current	Yes
1000mA	25V-38V
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	3600lm-4000lm-3800lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	2.750kg
Pcs/Carton	4
Barcode	5291889077312
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!

