
Product Datasheet

www.1-light.eu

10 Office & Kitchen>UGR19 Backlit CCT V

62150BRU/B/V

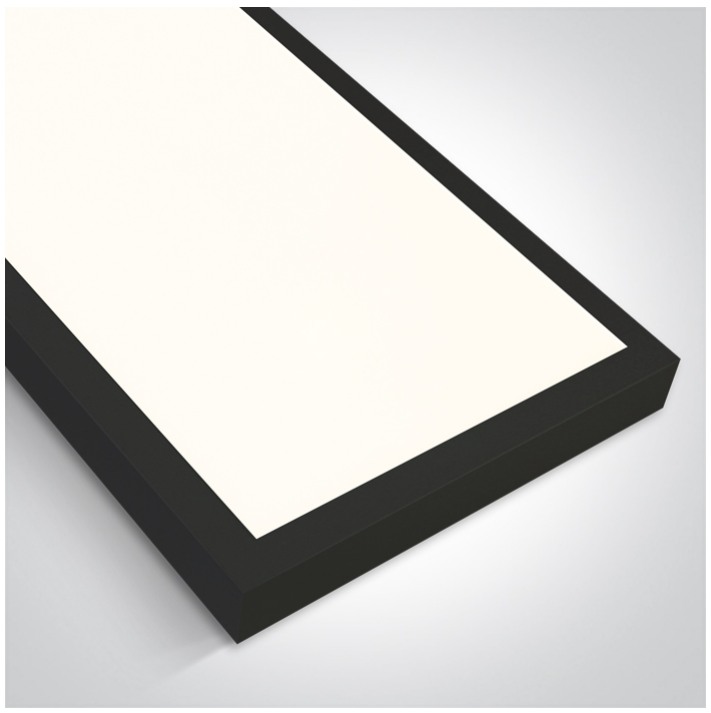

30x150cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1200mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI UGR19

Downloads

IES

Dimensions



Physical Specification

Item Group	10 Office & Kitchen
Family	UGR19 Backlit CCT V
Order Code	62150BRU/B/V
Colour	Black
Material	Aluminium + Steel
Shape	Rectangular
Length	1500mm
Width	300mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Power(Watts)	45,6W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30W-45,6W

Power Factor	0,9
Constant Current	Yes
1200mA	25-38V
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	4500lm-5000lm-4750lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	4.075kg
Pcs/Carton	4
Barcode	5291889077459
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

