Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The LED High Power Box Aluminium

7058A/W/V



120W Power and CCT variable high power box. IP65.

Complete with non-dimmable driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK08 80 CRI CE

Downloads

IES

Dimensions

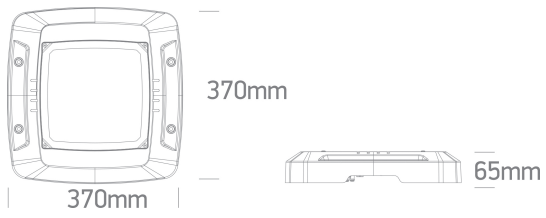

Physical Specification

Item Group	20 Industrial & Floodlights
Family	The LED High Power Box Aluminium
Order Code	7058A/W/V
Colour	White
Material	Aluminium
Shape	Rectangular
Length	370mm
Width	370mm
Height	65mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes

IK Rating	8

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	36W / 60W / 90W / 120W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Power(Watts)	36W / 60W / 90W / 120W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
F Mark	F

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	120W
Power Factor	0,9
IP Rating	IP42

Safety Class	

Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	18000 lm (120w)
Light Efficiency	150lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	4.800kg
Pcs/Carton	1
Barcode	5291889077503
HS Code	9405413990

Certification & Warranty

Warranty	5 years

switch to
one light!

