Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The LED High Power Box Aluminium

7058R/W/C



120W IP65, LED High Power Boxes.


Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP65 70 CRI CE

Downloads

Dimensions

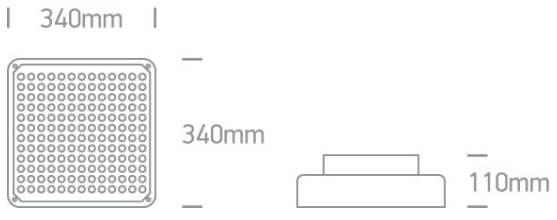

Gallery



Physical Specification

Item Group	20 Industrial & Floodlights
Family	The LED High Power Box Aluminium
Order Code	7058R/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	414mm

Width	414mm
Height	100mm
Cutout Hole Width	380mm
Cutout Hole Length	380mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	120W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	4200mA
Voltage	28V
Power(Watts)	118W
IP Rating	IP65
Light Source	LED built in

LED Type	SMD 3030
LED Brand	Osram
LED Number	140

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	118-151W
Power Factor	0,9
Constant Current	Yes
Output	4200mA
Voltage Range	28-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

Illumination Data

Colour Temperature	4000K
Lumen Output	10800lm
Light Efficiency	90lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	9.700kg
Pcs/Carton	1
Barcode	5291889042686
HS Code	9405413990

Certification & Warranty

Warranty	5 years

switch to
one light!

one LIGHT

