Product Datasheet

www.1-light.eu

07 Strips & Profiles>The Ultra Slim Range 24V

7833/C



Slim LED light strip, with SMD2110 LEDs, 196LEDs/meter, 14,4W/meter.Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 3,5cm (7-LED segment).

Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 90 CRI DIMMABLE

Downloads

IES

Dimensions



Gallery



Related items



20030

Physical Specification

Item Group	07 Strips & Profiles

Family	The Ultra Slim Range 24V
Order Code	7833/C
Shape	Rectangular
Length	5m
Width	4mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	III
Power(Watts)	14,4W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2110
LED Brand	Refond
LED Number	196Leds/m


Illumination Data

Colour Temperature	4000K
Lumen Output	1300lm/m
Light Efficiency	90,28lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Length	24cm
Box Width	21,5cm
Box Height	2cm
Box Weight	0.150kg
Pcs/Carton	40
Barcode	5291889058816
HS Code	9405499090

Energy Label

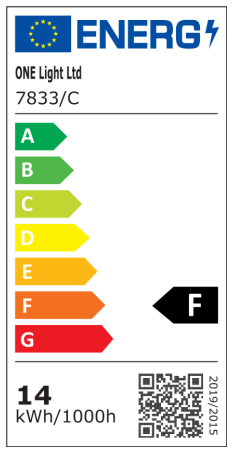

Energy Class	F

Certification & Warranty

Warranty	5 years

switch to
one light!

