Product Datasheet

www.1-light.eu

07 Strips & Profiles>The 230V IP65 Range

7860/D



230V Waterproof LED strip 9W/m, IP65 .

Supplied in 50m rolls.

Can be cut every 1m.

Avoid direct sunlight.

Requires power supply order code 7860P.

Complies with standard EN60598-1 and any other specific standards.

IP65 80 CRI TRIAC DIMMABLE

Downloads

IES

Dimensions



Gallery



Must be ordered separately




7860P

Accessories




7860C



7860E



7860F



7860L



7860R

Physical Specification

Item Group	07 Strips & Profiles
Family	The 230V IP65 Range
Order Code	7860/D
Shape	Rectangular
Length	50000mm
Width	14mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	9W/m
IP Rating	IP65
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	F

Fitting

Safety Class	⧈
Power(Watts)	9W/m

IP Rating	IP65
Light Source	LED built in
LED Type	SMD 3528
LED Brand	Epistar

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	450W
Power Factor	0,9
IP Rating	IP65
Safety Class	
Brand	0
Protection	0


Illumination Data

Colour Temperature	6000K
Lumen Output	750lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	0.152kg
Pcs/Carton	50
Barcode	5291889030911
HS Code	9405423100

Energy Label

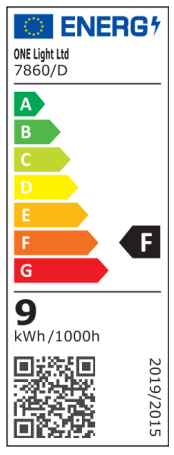

Energy Class	F
Energy Consumption	9KWh/1000h

Certification & Warranty

Warranty	2 years
Weee Directive	Yes

