Product Datasheet

www.1-light.eu

07 Strips & Profiles>The 230V IP65 Range

7862/C



13W/m Mains voltage LED strip, IP65.

Available in 30m rolls.

Requires power supply order code 7862P.

Can be cut every 1 meter.

Avoid direct sunlight.

Complies with standard EN60598-1 and any other specific standards.

IP65 80 CRI TRIAC DIMMABLE

Downloads

IES

Dimensions




Gallery








Accessories




7862C



7862E



7862F



7862L



7862P

Physical Specification

Item Group	07 Strips & Profiles
Family	The 230V IP65 Range
Order Code	7862/C
Material	PVC
Shape	Rectangular
Length	30m
Height	18mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W/m
IP Rating	IP65
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting

Safety Class	

IP Rating	IP65
Light Source	LED built in
LED Type	SMD 5630
LED Brand	Epistar
LED Number	120LEDs/m

Gear

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP65
Safety Class	


Illumination Data

Colour Temperature	4000K
Lumen Output	1050lm/m
Light Efficiency	80,76lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	34cm
Box Width	34cm
Box Height	16,5cm
Box Weight	0.193kg
Pcs/Carton	30
Barcode	5291889057642
HS Code	9405423100

Energy Label

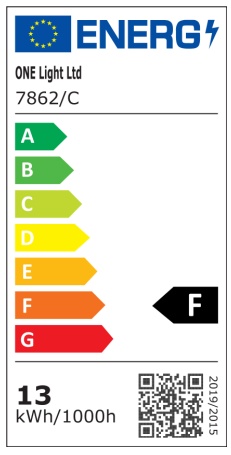

Energy Class	F

Certification & Warranty

Warranty	2 years

