Product Datasheet

www.1-light.eu

07 Strips & Profiles>230V Neon Flex Lightline

7864/C



230V Waterproof Square Neonflex 9W/m, IP65 .

Supplied in 50m rolls.

Can be cut every 1m.

Avoid direct sunlight.

Complete power supply 7864P.

Complies with standard EN60598-1 and any other specific standards.

IP65 80 CRI TRIAC DIMMABLE

Downloads

IES

Dimensions




Accessories



7864C



7864E



7864F



7864P

Physical Specification

Item Group	07 Strips & Profiles
Family	230V Neon Flex Lightline
Order Code	7864/C
Material	PVC

Shape	Rectangular
Length	50000mm
Width	8mm
Height	12mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⧈
Power(Watts)	9W/m
IP Rating	IP65
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	F

Fitting

IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

LED Number	120LEDs/m

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	450W
Power Factor	0,9
IP Rating	IP65


Illumination Data

Colour Temperature	4000K
Lumen Output	270lm
Light Efficiency	30lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	0.154kg
Pcs/Carton	50
Barcode	5291889066514
HS Code	9405423100

Energy Label

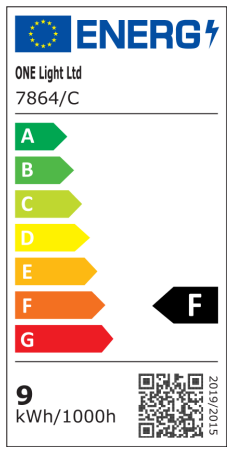

Energy Class	F

Certification & Warranty

Warranty	2 years

switch to
one light!

