# Product Datasheet

www.1-light.eu

20 Industrial & Floodlights>The Industrial IP65 Linear Range Adjustable

## 63200L/C



200W SMD LED Linear Industrial High Bay.

Complete with non-dimmable driver.


Complies with standard EN60598-1 and any other specific standards.

IP65 IK06 80 CRI ADJUSTABLE CE

### Downloads

IES

### Dimensions

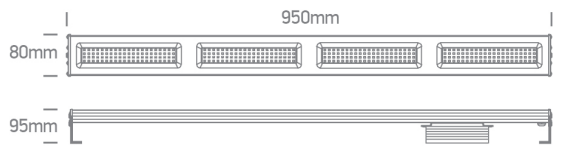


### Physical Specification

| | |
|---|---|
| Item Group | 20 Industrial & Floodlights |
| Family | The Industrial IP65 Linear Range Adjustable |
| Order Code | 63200L/C |
| Colour | Black |
| Material | Aluminium |
| Shape | Rectangular |
| Length | 950mm |
| Width | 80mm |
| Height | 95mm |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Indoor | Yes |

| | |
|---|---|
| Outdoor | Yes |
| Adjustable | 1 Direction |
| IK Rating | 6 |

## Electrical Characteristics

| | |
|---|---|
| Gear | Built In |

### Fitting + Driver

| | |
|---|---|
| Input Voltage | 120-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 200W |
| IP Rating | IP65 |
| Light Source | LED built in |
| Dimmable | No |
| Cable Length | 100cm |
| F Mark |  |

### Fitting

| | |
|---|---|
| Input Type | Constant Current |
| Light Source | LED built in |
| LED Type | SMD |

### Gear

| | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 120-240V |
| Safety Class |  |

## Illumination Data

| | |
|---|---|
| Colour Temperature | 4000K |
| Lumen Output | 20000lm |
| Light Efficiency | 100lm/W |
| CRI | 80 |
| Beam Angle | 120° |
| Illumination Diagram |  |

## Packing Info

| | |
|---|---|
| Box Weight | 2.700kg |
| Pcs/Carton | 4 |
| Barcode | 5291889088769 |
| HS Code | 9405413990 |

## Certification & Warranty

| | |
|---|---|
| Warranty | 3 years |

switch to
one light!

