
INSTALLATION MANUAL

89007AL


LED DALI DIMMABLE QUICK FIX PUSH TO DIM DALI

230V | 50/60Hz | IP20 | DALI & Push to DIM Dimmable


Adjustable output using DIP switches.



DALI Dimming wiring diagram

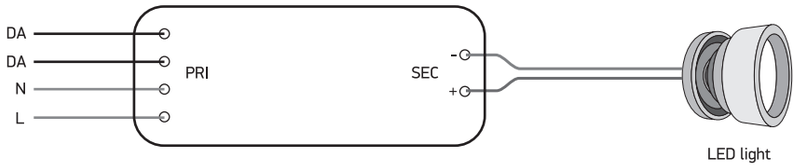

Push to DIM wiring diagram

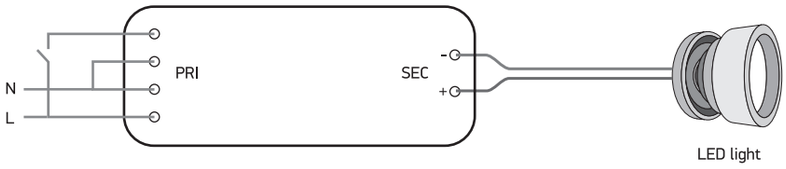

Specifications								
Input Voltage & Frequency	220-240V AC 50/60Hz							
Power Factor	≥0,90							
Operating Temperature	Ta: 50°C Tc: +80°C							
Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Voltage	5-21V	5-20V	5-17V	5-16V	5-14V	5-13V	5-12V	5-11V
Output Power	1,75W-7W	2W-8W	2,25W-7,65W	2,5W-8W	2,75W-7,7W	3W-7,8W	3,25W-7,8W	3,5W-7,7W

Current Selection





Primary cable: 2X0,75mm²

Secondary cable: 2X0,50mm²

The driver's output current can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current is set.

Push to Dim

Short Press (40~500ms) - Turn On or Off. Drivers will remember the state they were in when powered off.

Long press (>500ms) - to enter dimming state.

Synchronization - Long press for more than 10 seconds to synchronize multiple drivers at 100% output.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Please select suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation.