

INSTALLATION MANUAL

89044L


230V | 50/60Hz | IP20 | DALI & Push to DIM Dimmable
Adjustable output using DIP switches.



DALI Dimming wiring diagram

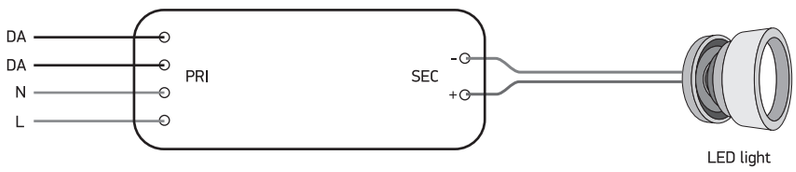


Push to DIM wiring diagram

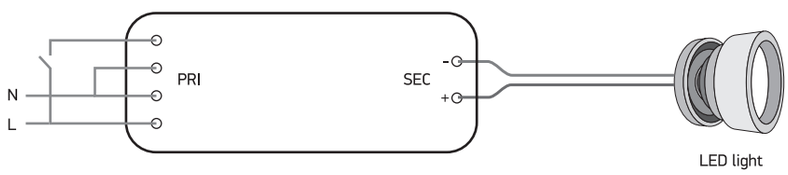

Specifications								
Input Voltage & Frequency	220-240V AC 50/60Hz							
Power Factor	≥0,95							
Operating Temperature	Ta: +45°C Tc: +85°C							
Output Current	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Voltage	20-50V	20-50V	20-50V	20-50V	20-48V	20-46V	20-40V	20-38V
Output Power	14W-35W	15W-37,50W	16W-40W	17W-42,50W	18W-43W	19W-43,70W	20W-40W	21W-40W

Current Selection





Primary cable: 2X0,75mm²
Secondary cable: 2X0,50mm²

The driver's output current can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current is set.

Push dimming operation:

Short Press - Turn On or Off.

Long press - Dimming down or up.

Synchronization - Long press for more than 10 seconds.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Please select suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation.