Product Datasheet

www.1-light.eu

06 Downlights Adjustable>Dark Mirror Reflector Range

11110E/W/W



10W COB LED adjustable recessed Spot with dark chrome reflector.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI ADJUSTABLE DARK LIGHT CE

Downloads

IES CE

Dimensions

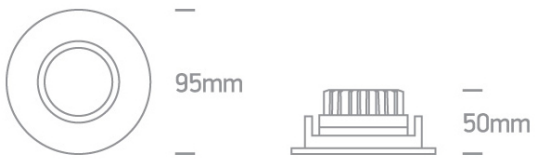

Physical Specification

Item Group	06 Downlights Adjustable
Family	Dark Mirror Reflector Range
Order Code	11110E/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	50mm
Diameter	95mm
Cutout Hole Diameter	85mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes

Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	250mA
Voltage	35,5V
Safety Class	
Power(Watts)	8,9W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Cree
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,25-10,5W
Power Factor	0,9
Constant Current	Yes
250mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	850lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	30°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Weight	0.292kg
Pcs/Carton	40
Barcode	5291889064206
HS Code	9405413990

Certification & Warranty

Warranty	3 years

switch to
one light!

